



ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

TON: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to ovide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to etermine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
FLORAL BEACH CORPORATION STREET ADDRESS (Including Apt., Unit, Suite and/or Bidg, Number) OR P.O. ROUTE AND BOX NUMBER	COMPANY NAIC NUMBER
SEASIDE DRIVE	
THER DESCRIPTION (Lot and Block Numbers, etc.) LOT C BLOCK E FLORAL SECTION 219 N. 5eq51.	de
CITY CHARGED BEACH	STATE ZIP CODE SC 29575
SURFSIDE BEACH SECTION B FLOOD INSURANCE RATE MAP (FIRM) INF	
rovide the following from the proper FIRM (See Instructions):	
	FIRM ZONE 6. BASE FLOOD ELEVATION
450111 308 E 9.30.88	FIRM ZONE 6. BASE FLOOD ELEVATION (IN AO Zones, use depth) VE 17
'. Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE): \$\frac{\xi}{2}\$. For Zones A or V, where no BFE is provided on the FIRM, and the community has establis the community's BFE: \frac{\xi}{2} \frac{\xi}{2	ned a BFE for this building site, indicate
SECTION C BUILDING ELEVATION INFORMATI	
g the Elevation Certificate Instructions, indicate the diagram number from the diagram cooribes the subject building's reference level 5. 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram, is at an elevation of 1 1 1 20 12 feet NGVD (or other FIRM datum—see Section B, Item 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal struction the selected diagram, is at an elevation of 1 1 1 20 12 feet NGVD (or other FIRM of the selected diagram, is at an elevation of 1 1 1 20 12 feet NGVD (or other FIRM of the selected diagram, is at an elevation of the building. (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is below (check one) the highest grade adjacent to the building. If no flood depth number is available, is one) the highest grade adjacent to the building. If no flood depth number is available, is level) elevated in accordance with the community's floodplain management ordinance? 3. Indicate the elevation datum system used in determining the above reference level elevation under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevation under Comments on Page 2.) 4. Elevation reference mark used appears on FIRM: X Yes No (See Instructions on Page 2.)	m the selected diagram is at an elevation and member of the reference level from atum—see Section B, Item 7). agram is feet above or or or
5. The reference level elevation is based on: 🖾 actual construction 🔲 construction draw (NOTE: Use of construction drawings is only valid if the building does not yet have the recase this certificate will only be valid for the building during the course of construction. A puill be required once construction is complete.)	ference level floor in place, in which post-construction Elevation Certificate
6. The elevation of the lowest grade immediately adjacent to the building is: 1 1 181.3 Section B, Item 7).	feet NGVD (or other-FIRM datum-see
SECTION D COMMUNITY INFORMATION	
1. In the community official responsible for verifying building elevations specifies that the refer is not the "lowest floor" as defined in the community's floodplain management ordinance, floor" as defined by the ordinance is: 1 1 1	the elevation of the building's "lowest


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or a owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

•		•						*
CERTIFIER'S NAME		LICENSE NUMBER (or Affix Seal)						
Michael S. Culler	Tr.	#5210						<u>-</u>
TITLE			COMPANY NA	ME				
Registered Land St	urveyor	· C	uller L	and Sur	veying.	, Inc.	*	-
ADDRESS			CITY				STATE	
P.O. Box 14327	<u>.</u>		urfside	Beach,	South	Carolina		2958
Wickel &	Culler (p.	-:			ATE /3/97	(803)	ONE 238-2333	
Copies should be made of		*	unity offici	al, 2) insur	ance age	ent/company,	, and 3) build	ing owner.
COMMENTS:	·· · · · · · · · · · · · · · · · · · ·	•	-				-	<u>.</u>
WITH CARO	, .						•	
Since in the second					•			

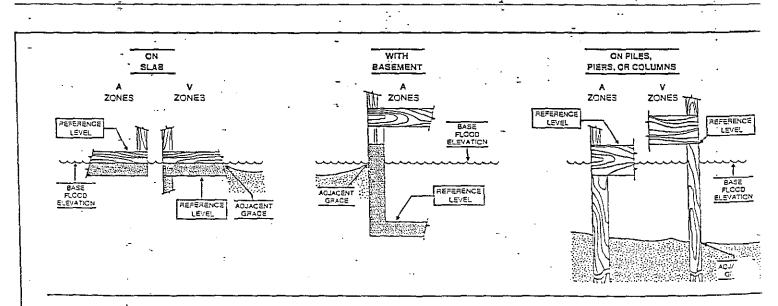

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.